

## Product specification sheet

### Floor socket/box

#### Designation:

Type: STAKOHOME-8802-E 2x power sockets 230V  
 Type: STAKOHOME-8802-Enw 1x power socket 230V, 2x RJ45 CAT6a  
**Other types (different instrumentation) upon request., is possible.**

#### Description:


Floor box made of solid aluminum cast iron with lid.

The lid can be closed even when connecting standard straight or curved plugs. Dimensions 125x125x72 mm. Inlet into the box is via two cable entries Ø 25 mm.

When installed in a mortar bed, it is mobile for passenger cars. 4 spacing screws, which are always located in the corner of the box, allow for a slight (approx. 5 mm) adjustment of the lid height (lid lifting) so that the stainless steel lid is in the same plane as the floor covering around the floor box. (When adjusting the height of the lid, the lid of the socket is only walking!).

**Mounting design:** Remove the cover from the screed to cover the installation site (polystyrene or wooden box approx. 150x150 mm), remove the carrier / tool holder (sockets) from the installation tray and fill the tray with paper, etc. Put the floor box into the mortar bed, glue, etc., and level to the level of the final floor covering above the concrete / screed / screed, including the lid (do not forget the lid height). Empty tubes (or cables directly) into designated holes 25 mm. The remainder is then filled with mortar, glue, foam, etc. Installation and connection must be carried out by a professional company / specialist with the necessary qualified expertise. **Please ensure that the cover is correctly positioned / positioned so that cables can be pulled out of the wired devices.** You can also use the supplied Ø25 mm plugs as bushings for each cable.

**Maintenance:** The drawer must be checked regularly and disposed of inside the dirt.

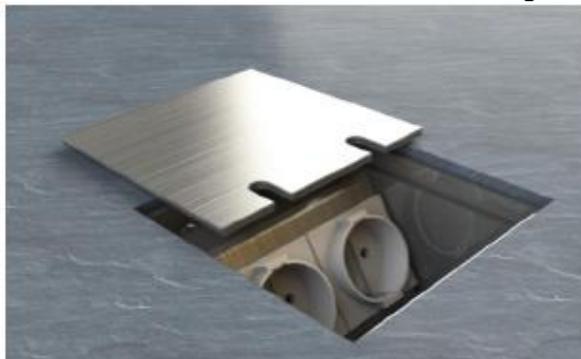

**Application:** family houses, apartments, offices, car showrooms and so on, protection IP20

#### Specification:

Material: Aluminum cast iron body / Stainless steel / stainless steel surface finish  
 Dimensions: 125x125x72 mm  
 Weight: approx 1500 g  
 Load capacity: 120kg / crossing by car (When adjusting the height of the lid by screws is for 120kg)  
 Plugs/equipment: 230V, VGA, RJ45, XLR, TV-SAT, TAE, USB, HDMI, so on..

Note: Print mistakes and changes are reserved.

**stakohome®**

Stakohome Network s.r.o.

IČ: 27213064, DIČ/VAT: CZ27213064

tel.: +420 226 517 522

fax: +420 226 517 379

stakohome@stakohome.cz

www.stakohome.cz

www.intelligentni-byt.cz

Address for invoice: Podnikatelská 565, 190 11 Praha 9, Běchovice, Czech Republic  
 Showroom and delivery address: Aloisovská 934/8, 198 00 Praha 9, Hloubětín, Czech Republic


## Technical Datasheet

### Floorbox

#### Designation:

|       |                    |  |
|-------|--------------------|--|
| Type: | STAKOHOME-8802-E   | 2x power sockets 230V                  |
| Type: | STAKOHOME-8802-Enw | 1x power socket 230V, 2x RJ45 CAT6a    |
| Type: | STAKOHOME-8802-Enw | 1x power socket 230V, 1x socket TV-SAT |

**Other types (equipment) on request**

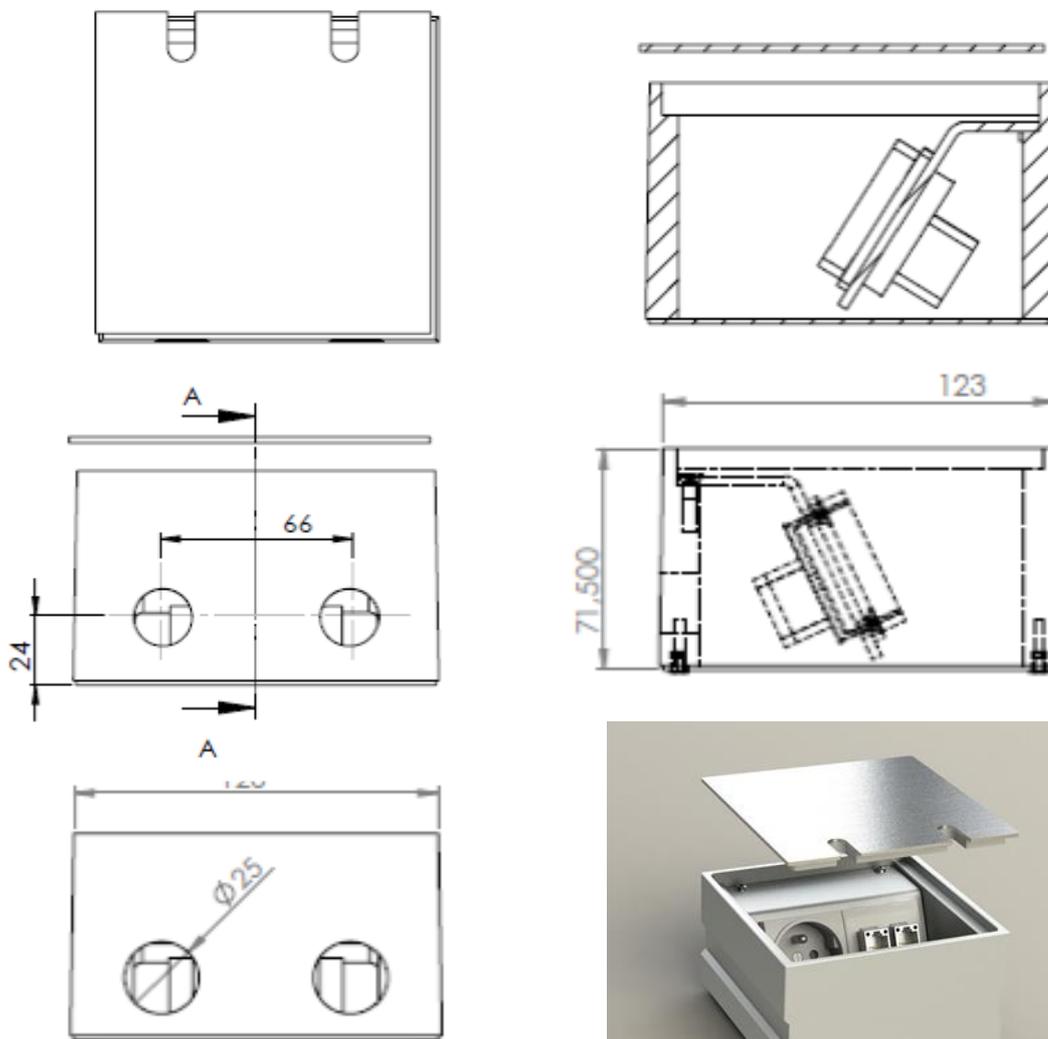

Attention!: The lid is lying on the box

Note: Print mistakes and changes are reserved.

**stakohome®**

Stakohome Network s.r.o.

IČ: 27213064, DIČ/VAT: CZ27213064

tel.: +420 226 517 522

fax: +420 226 517 379

stakohome@stakohome.cz

www.stakohome.cz

www.intelligentni-byt.cz

Address for invoice: Podnikatelská 565, 190 11 Praha 9, Běchovice, Czech Republic  
Showroom and delivery address: Aloisovská 934/8, 198 00 Praha 9, Hloubětín, Czech Republic